

ANTI SKATEBOARD STUD



Kent Swoosh Stud KSWASS/855/30/R15

Specify:

Kent Swoosh Anti Skate Studs KSWASS/855/30/R15; Grade 316L Stainless Steel; Bright Peened.

Kent Swoosh Studs are used to deter unwanted skateboarding in order to prevent damage to street furniture and stonework elements. The studs eliminate the long continuous edge of many street furniture and stone products.


The stainless steel material is ideal for high-traffic pedestrian areas and it does not adversely affect theaesthetics of the elements they are protecting.

Features

- → Bright Peened
- → Grade 316L Stainless Steel
- Easy installation
- Used to deter skateboarding on long edge street furniture
- Can be incorporated onto the full range of Kent Stainless seats and benches






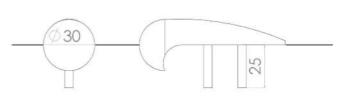



Product Dimentions:


Reference	Length	Diameter
Kent Swoosh KSWASS/855/30/R15	85mm	30mm

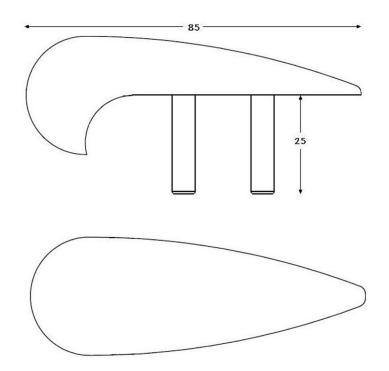


Kent Swoosh Stud KSWASS/855/30/R15

Installation:

- 1.Drill x2 10mm diameter hole by 30mm deep.
- 2. Fill with chemical mortar (Kent Stainless recommend Mungo MIT-SE Plus)
- 3. Insert the anti skate board stud and leave to set for 24 hours.

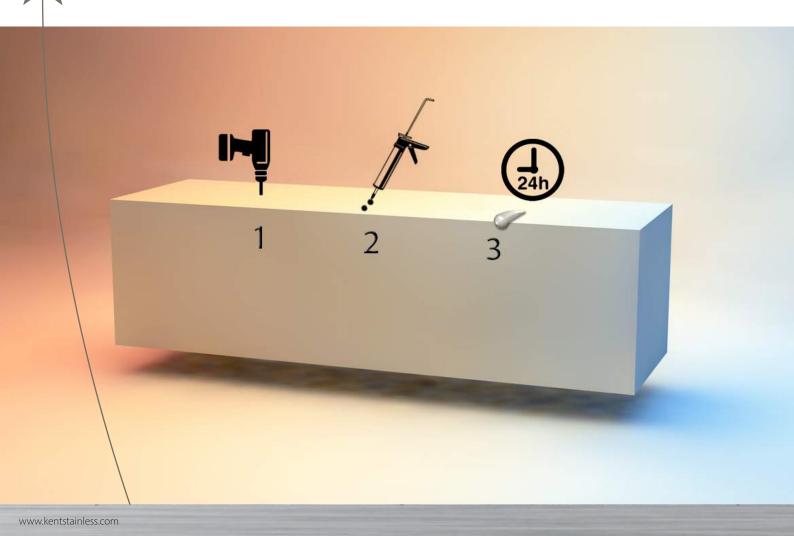

Product Options:

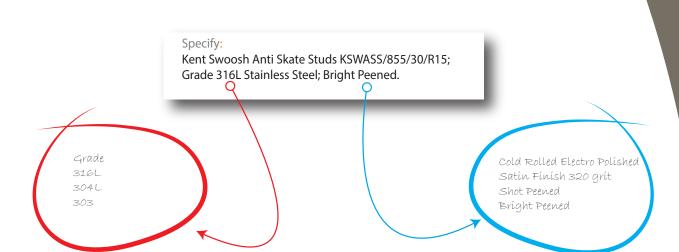



Kent Swoosh Stud KSWASS/855/30/R15

Overview

Kent Swoosh Studs are used to deter unwanted skateboarding in order to prevent damage to street furniture and stonework elements. The studs eliminate the long continuous edge of many street furniture and stone products.

Maintenance

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particulary inareas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishusing chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainlees steel cleaning products.





