




## KENT KDTG150 - Commercial Gully (Dished Channel)

The KDTG150 is a tile profile gully designed for insertion in a channel formed from dished tiles. For Areas which require height adjustment it is complemented by the KVBO Body. Also when a side outlet version is needed it is complemented by a KHBO body - see below.

This 150mm x 150mm top is suited to the Dorset Wooliscroft Channel Tile but other channel tiles can be matched on request.

### Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Satin finish as standard
- Made to order - contractor to supply tile
- Lock down as standard

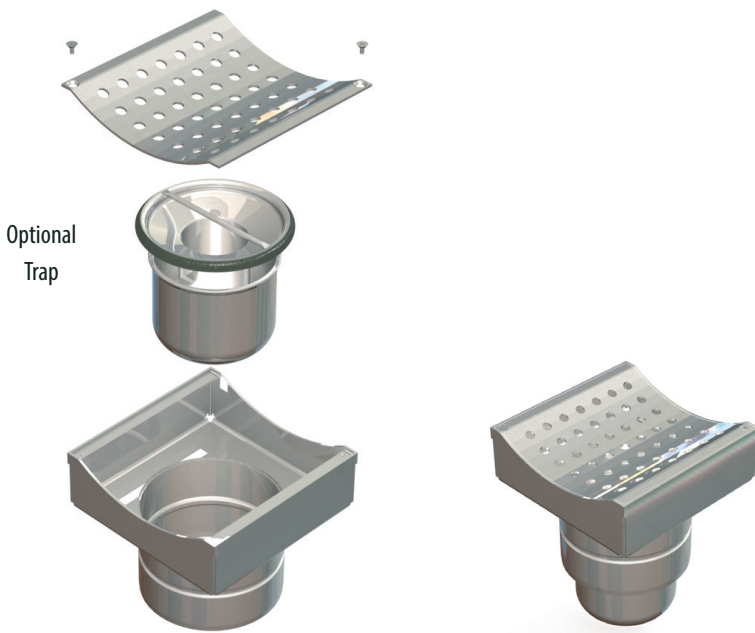

**Barefoot**



**Pedestrian**

**BS EN1253 Class K3**

Product Code	Height	Width	Depth	Outlet	Flow Rate	Description
KDTG150/110TP	125	150	150	110	1.4 l/s	Top Part Only Bottom Outlet 110mm
KDTG150/110	220-275	150	150	110	1.4 l/s	Adjustable Height 2 Part Bottom Outlet - See Page 4
KDTG150/50	160-205	150	150	50	0.9 l/s	Adjustable Height 2 Part Side Outlet 50mm- See Page 4
KDTG150/1.5"BSP	140-185	162	162	1.5"BSP	0.9 l/s	Adjustable Height 2 Part Side Outlet 1.5"BSP- See Page 4
KFT110						110mm Trap with 50mm water seal

**Specify Kent KDTG150/110TP Floor Gully. 150mm x 150mm, fixed height floor drain. Grade 304 stainless steel with a satin polish finish, supplied with KFT110 Trap.**