





KENT KVT162/50 – Commercial Gully (Pedestrian)

This is a modified version of our KVT162/110 Floor Gully to suit a 50mm push fit bottom outlet. It is supplied as standard with a lockdown perforated grating.




Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Satin finish as standard

Untrapped

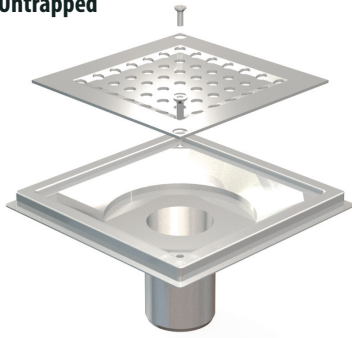

Trapped

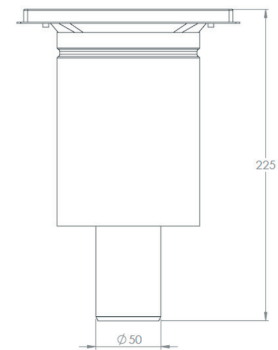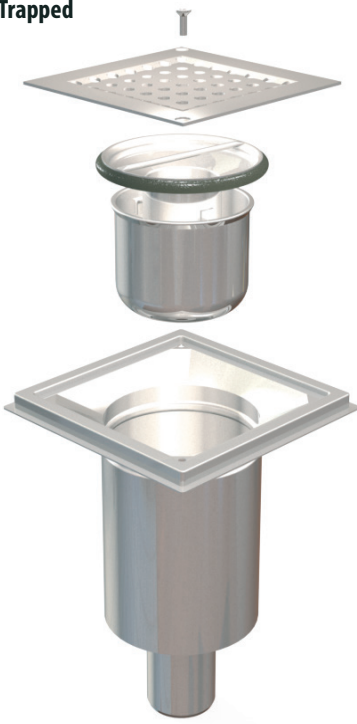

Product Code	Height	Width	Depth	Outlet	Flow Rate	Description
KVT162/50	100	162	162	50	0.9 l/s	Fixed Height Untrapped
KVT162/50(T)	225	162	162	50	0.9 l/s	Fixed Height Trapped

**BS EN1253
Loading Class K3**

Specify Kent KVT162/50 Floor Gully. 162mm x 162mm, fixed height floor drain. Grade 304 stainless steel with a satin polish finish.



Barefoot



Pedestrian