


The KV220/110 Gully is a Round Body, Round Top/Bottom Outlet Gully for Heavy Duty Areas with High Flow Rates. They are designed for use primarily in Food/ Beverage/Pharmaceutical factories. They can be used in both light duty and very heavy duty trafficked areas (depending on the grating chosen). The KV220/110 standard gully takes 10mm thick gratings as well as 3mm thick covers that are made to sit in a 10mm recess (Perforated Gratings, Sealed Gratings). The KV220/110DS version of this gully (DS = Deep Swage) takes all 25mm deep gratings offered by Kent (Mesh, Heelproof Mesh, Factory Ladder, Heelproof Ladder, Gratings). When used with Heelproof Gratings it is suitable also for Civil Projects. In most cases a 110mm or 160mm outlet is required, but this can easily be substituted for a 4" or 6" SCH10 outlet pipe. It is trapped as standard with the Kent Bell Trap.

### Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Strong
- Short lead time
- Usable in both heavy and light duty areas
- Suitable for internal factory drainage and external civil drainage projects

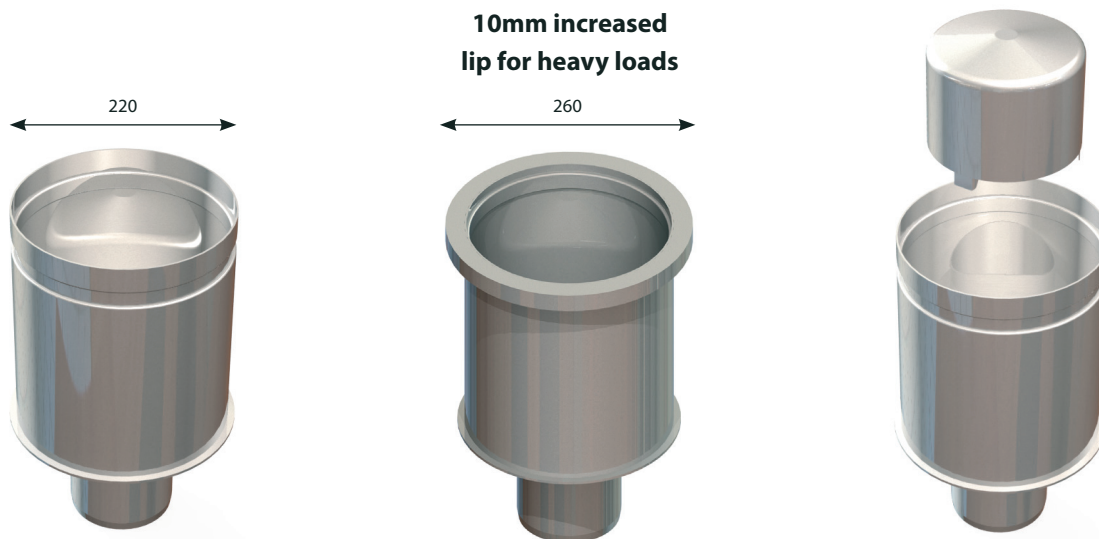

Product Code	Height	Diameter	Outlet	Swage	Flow Rate*
KV220/110	250	220 - 260	110	10	6.10 l/s
KV220/110DS	250	220 - 260	110	25	6.40 l/s
KV270/110	250	270 - 310	110	10	6.10 l/s
KV270/110DS	250	270 - 310	110	25	6.40 l/s
KV370/160	300	370 - 410	160	10	16.80 l/s
KV370/160DS	300	370 - 410	160	25	17.03 l/s

\* flow rate is also dependant on grating chosen

**Specify: Kent KV220/110 trapped industrial gully; 280mm x 280mm; grade 304 stainless steel; complete with \_\_\_\_\_ grating.**

Choose the product code from the dimensions table above.  
Add specification options from Page 10-12.

Choose Grating from page 83-92

**BS EN1253 Loading Class L15 / R50 / M125 / N250 / P400**

This gully can be subjected to very heavy loads but must have the correct heavy duty grating to achieve these loads.

